

10-05-00

A

Practitioner's Docket No. 13389.00017

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of

Inventor(s): Frank D'Agunno

For (title): A Method and Apparatus for Removing a Golf Club Head From a Golf Club Shaft

1. Type of Application

This transmittal is for an original (nonprovisional) application.

2. Papers Enclosed

A. Required for filing date under 37 C.F.R. 1.53(b) (Regular) or 37 C.F.R. 1.153 (Design) Application

10 Page(s) of Specification

4 Page(s) of Claims

5 Sheet(s) of Drawing(s)--Informal

B. Other Papers Enclosed

1 Page(s) of abstract

3. Declaration or Oath

Not Enclosed.

4. Inventorship Statement

The inventorship for all the claims in this application is the same.

5. Language

10/02/00  
Jc931 U.S. PTO  
09/676627

Jc931 U.S. PTO  
09/676627  
10/02/00

00676627-100200

English

6. **Fee Calculation (37 C.F.R. Section 1.16)**


Regular Application

CLAIMS AS FILED					
Claims	Number Filed	Basic Fee Allowance	Number Extra	Rate	Basic Fee 37 CFR 1.16(a) \$710.00
<hr/>					
Total Claims (37 CFR 1.16(c))	12	- 20 =	0 x	\$18.00	\$0.00
<hr/>					
Independent Claims (37 CFR 1.16(b))	4	- 3 =	1 x	\$80.00	\$80.00
<hr/>					
Multiple Dependent Claim(s), if any (37 CFR 1.16(d))			+	\$270.00	\$0.00
<hr/>					
Filing Fee Calculation					\$790.00

7. Fee Payment Being Made at This Time

Not Enclosed

No filing fee is to be paid at this time.



Signature of Practitioner

Reg. No.: 43,631  
Tel. No.: 215-972-8387

Bruce D. George  
Saul Ewing LP  
Centre Square West  
1500 Market Street, 38th Floor  
Philadelphia, PA 19102


Certificate of Mailing Under 37 C.F.R. 1.10

EXPRESS MAIL NO.: 9558240915us

Date of Deposit: October 2, 2000

I hereby certify that this paper, along with any paper referred to as being attached or enclosed and/or fee is being deposited with the United States Postal Service, "Express Mail - Post Office to Addressee" service under 37 C.F.R. 1.10, on the date indicated above, and is addressed to the Assistant Commissioner for Patents, Washington, DC 20219.

Date 10-2-00



Signature

Kathleen Nancy Krajicek

Type or print name of person

# **A METHOD AND APPARATUS FOR REMOVING A GOLF CLUB HEAD FROM A GOLF CLUB SHAFT**

Invented By:  
Frank D'Agunno

## **Related Applications**

This application is a continuation-in-part (CIP) of applicant's copending United States Patent Application No. 09/427,461, filed October 22, 1999, entitled "Graphite Golf Shaft Removal Apparatus," which application claims priority to United States Provisional Patent Application No. 60/106,223, filed October 30, 1998, entitled "Graphite Golf Shaft Removal Apparatus." The above referenced patent applications are incorporated in their entirety herein by this reference.

## **Field Of The Invention**

The present invention relates generally to golf equipment, and more particularly to a method and apparatus for removing a head of a golf club from a shaft of the golf club.

## **Background Of The Invention**

The desirability of repairing or customizing golf clubs by removing a head of a golf club from a shaft of the golf club has been recognized for years, and various devices known as shaft removers or shaft pullers exist for this purpose.

Generally, a conventional shaft remover requires that the golf club shaft (most often graphite) be clamped securely in the apparatus. A threaded shaft contained within the apparatus moves a block bearing against the golf club head. The threaded shaft is rotated to apply a slight amount of axial force against the club head. Heat is applied to the club head until the user believes the epoxy bond, securing the golf club head to the



against a head of a golf club to detach the head from a shaft of the golf club simultaneously with the breaking of the epoxy bond securing the head to the shaft. Accordingly, the user is relieved of estimating the amount of heat required to break the epoxy bond, which can result in damaging the graphite shaft.

In one aspect of the present invention, the golf club shaft removing apparatus includes a frame, a clamping mechanism connected to the frame for securing the golf club and a force mechanism. The force mechanism is also connected to the frame and includes a hydraulic piston, a hollow shaft, a forcing spring, and a turret.

In another aspect of the present invention, the frame includes a block having a bore through which the hydraulic piston slidably resides. The frame can also include a base, a first upstanding frame portion supporting the clamping mechanism and a second upstanding frame portion supporting the force mechanism.

In another aspect of the present invention, the clamping mechanism includes a threaded clamping screw, a clamping handle to turn the screw, a moving block, and an upper and lower jaw. The upper jaw may reside within the moving block, while the lower jaw may reside within the first upstanding frame portion. The upper and lower jaws engage and secure the golf club shaft.

In another aspect of the present invention, the force mechanism includes a hydraulic cylinder having a hydraulic piston and a piston handle, a hollow shaft connected to the end of the piston, a forcing spring within the hollow shaft and a turret. The force mechanism communicates force to the golf club head via the piston, the hollow shaft, the spring and the turret. The hollow shaft can have an open end and a closed end, the closed end being connected to the distal end of the piston. The forcing spring can have a first end and a second end, with the first end of the spring abutting the interior closed end of the

03576627 100200

hollow shaft. The turret may have a smaller diameter portion and a larger diameter portion, with the smaller diameter portion inserted in the open end of the hollow shaft abutting the second end of the spring. The larger diameter portion of the turret may be external to the shaft with a slot designed to engage the shaft of the golf club while abutting the head of the golf club. The turret could also include about its periphery multiple slots differing in size to engage a variety of golf club shaft diameters.

In another aspect of the present invention, an alignment spring exists for resisting axial movement of the hollow shaft in response to the force created by the hydraulic piston. The alignment spring may have two ends, one end connected to the frame and the other end connected to the hollow shaft or the turret. Alternatively, one end of the alignment spring is connected within a second bore in the first upstanding portion of the frame, while the second end of the alignment spring is connected to a tab at the distal end of the hollow shaft.

In another of its aspects, this invention provides a method for removing a golf club head from a golf club shaft by securing the shaft of the golf club and introducing a force on the head of the golf club where the force alone is capable of detaching the head of the golf club from the shaft of the golf club upon the breaking of an epoxy bond securing the head of the golf club to the shaft of the golf club. Heat is then applied to the head of the golf club until a temperature is reached sufficient to break the epoxy bond securing the head of the golf club to the shaft of the golf club. Simultaneous with reaching a temperature sufficient to break the epoxy bond, the force detaches the head of the golf club from the shaft of the golf club. The force can be introduced to the head of the golf club by compressing a forcing spring. The force in the compressed spring is alone capable of detaching the head of the golf club from the shaft of the golf club upon heating the head of

the golf club to a temperature sufficient to break the epoxy bond. Simultaneous with the breaking of the epoxy bond, the compressed forcing spring expands to move the head of the golf club away from the shaft of the golf club via the turret.

### Brief Description Of The Drawings

For the purpose of illustrating the invention, there is shown in the drawings a form which is presently preferred; it being understood, however, that this invention is not limited to the precise arrangements and instrumentalities shown.

Figure 1 illustrates a front elevation view of a golf club shaft remover in accordance with the present invention;

Figure 2 illustrates a rear elevation view of the golf club shaft remover shown in Figure 1;

Figure 3 illustrates a right end elevation view of the golf club shaft remover shown in Figure 1;

Figure 4 illustrates a left end elevation view of the golf club shaft remover shown in Figure 1;

Figure 5 illustrates a top plan view of the golf club shaft remover shown in Figure 1;

Figure 6 illustrates a bottom plan view of the golf club shaft remover shown in Figure 1;

Figure 7 illustrates a partial front elevation view and partial cross-section view of the golf club shaft remover, in accordance with the present invention, with jaws closed, securing a golf club shaft, and a turret engaging the golf club shaft while applying a force to a golf club head, with a hosel of the golf club head being heated;



Figure 8 illustrates a front elevation view of the golf club shaft remover in accordance with the present invention with jaws in an open position after a golf club head has been removed from a golf club shaft;

Figure 9 illustrates an elevation view of a multi-slotted turret in accordance with the present invention; and

Figure 10 illustrates a right end elevation view of the golf club shaft remover shown in Figure 1 without the inclusion of the turret.

### **Detailed Description Of The Invention**

Referring now to the drawings, wherein like numerals indicate like elements, there is shown in the Figures generally, and especially Figure 1, an illustration of a golf club shaft remover 10. The golf club shaft remover 10 includes a frame 20, a force mechanism 30, and a clamping mechanism 50. The clamping mechanism 50 secures a golf shaft 102 of a golf club 100 while the force mechanism 30 applies a hydraulic force against a hosel 106 of a head 104 of the golf club 100.

The frame 20 includes a base 21, a block 22, a first upstanding portion 26, a second upstanding portion 27, and a clamping screw support block 28. The first upstanding frame portion 26 supports the clamping mechanism 50, while the second upstanding frame portion 27 supports the force mechanism 30.

The force mechanism 30 includes a hydraulic cylinder 31 having a hydraulic piston 32 and a hydraulic piston handle 34. The hydraulic cylinder 31 can also include a pressure relief valve 36. A hollow shaft 40 is fixedly connected to a distal end of the hydraulic piston 32 (point of connection not shown). The hollow shaft 40 and the piston 32 slidably reside within a bore 24 (not shown in Figure 1) through the block 22 of the frame 20.

Referring to Figure 7, illustrating a cross-section of the block 22 and showing the bore 24 within the block 22. Figure 7 also illustrates that the hollow shaft 40 has an open end and a closed end. A forcing spring 48, introduced into the open end, resides within the hollow shaft 40. A first end of the forcing spring 48 abuts the interior closed end of the hollow shaft 40. A turret 46, having a smaller diameter portion 60 and a larger diameter portion 61 partially resides slidably within the open end of the hollow shaft 40. An end of the smaller diameter portion 60 of the turret 46 is introduced into and resides residing within the open end of the hollow shaft 40. The end of the smaller diameter portion 60 of the turret 46 abuts the second end of the forcing spring 48. The larger diameter portion 61 of the turret 46, residing external to the hollow shaft 40, includes a plurality of slots 47 to engage the shaft 102 of the golf club 100 while abutting the head 104 of the golf club 100. The turret 46 is rotatable about the axis of the piston 32 and the hollow shaft 40 to position one of the plurality of differing sized slots 47 into engagement with the shaft 102 of the golf club 100.

Figure 9 illustrates the turret 46 having multiple slots 47, each differing in size. The various size slots 47 are designed to accommodate golf club shafts of various diameters.

Referring again to the Figures generally, and especially Figure 1, the golf club shaft remover 10 includes an alignment spring 42 which resists axial movement in the hollow shaft 40 and the piston 32 in response to the hydraulic force created by the force mechanism 30. The alignment spring 42 has a first end (not shown) attached within the block 22 of the frame 20 and a second end attached to a tab 44 on the distal end of the shaft 40.

The clamping mechanism 50 includes an externally threaded clamping screw 52 rotatably residing within a bore 29 (shown in the cross-section of Figure 7) through the clamping screw support block 28. At one end of the screw 52, a clamping handle 54 is connected to facilitate the rotatable operation of the clamping mechanism 50. The second end of the screw 52 is connected to a moving block 56 housing a movable upper jaw 58. The movable upper jaw 58 secures the shaft 102 against a stationary lower jaw 59, which is removably connected to a top of the block 22. The movable upper jaw 58 and the stationary lower jaw 59 can be removed and replaced with jaws of different size to accommodate golf club shafts of various diameter.

In operation, a golf club 100 is inserted into the golf club shaft remover 10 with its shaft 102 placed within the stationary lower jaw 59 and its hosel 106 bearing against an appropriately sized slot 47 in the rotatable turret 46, as shown in Figure 1. Referring now to Figure 7, the clamping handle 54 is rotated in a clockwise direction to threadably move the clamping screw 52 in a 45-degree direction relative to the horizontal through the internally threaded bore 29 in the clamping screw support block 28. The clockwise rotation (as shown by the arrow) of the clamping screw 52 drives the moving block 56 toward the shaft 102 of the golf club 100 until the movable upper jaw 58 engages and securely clamps the shaft 102 of the golf club 100 against the stationary lower jaw 59.

The hydraulic piston handle 34 is manually and pivotally pumped to drive the piston 32 horizontally toward the head 104 of the golf club 100, applying a force against the head of 104 of the golf club 100 via the piston 32, the hollow shaft 40, the forcing spring 48 and the turret 46. The turret 46, bearing against the hosel 106, is resistant to the horizontal movement of the piston 32 and the hollow shaft 40 toward the head 104 of the golf club 100. The continual application of this hydraulic force drives the

00576627, 100200

hollow shaft 40 toward the interior wall 49 of the turret 46, compressing the forcing spring 48. Upon reaching the maximum compression of the forcing spring 48, where the distal end of the hollow shaft 40 touches the interior wall 49 of the turret 46 (as shown in Figure 7), sufficient potential energy exists in the coiled forcing spring 48 to detach the head 104 of the golf club 100 from the shaft 102 upon the breaking of the epoxy bond securing the head 104 to the shaft 102 of the golf club 100.

During the application of horizontal hydraulic force to compress the forcing spring 48, alignment spring 42 prevents axial movement in the hollow shaft 40 and the piston 32, which if allowed to occur could prevent the complete compression of the forcing spring 48.

Heat is then applied to the hosel 106 of the head 104 of the golf club 100, usually by propane torch or heat gun (as shown in Figure 7), until the epoxy bond securing the head 104 to the shaft 102 of the golf club 100 releases or melts. Simultaneous with the breaking of the epoxy bond, the compressed forcing spring 48 expands to drive the turret 46 toward the head 104 of the golf club 100 to remove the head 104 from the shaft 102 of the golf club 100 (as shown in Figure 8). The expansion of the forcing spring 48 drives the turret 46 and the head 104 a sufficient horizontal distance (without further application of hydraulic force) to remove or at least substantially separate the head 104 from the shaft 102 so that the user need not estimate when and if sufficient heat has been applied to the hosel 106 to break the epoxy bond. Therefore, damage to the integrity of the graphite shaft 102 due to overheating is avoided.

The clamping handle 54 is then rotated in a counter-clockwise direction (opposite the arrow shown in Figure 7), threadably moving the clamping screw 52 in a 45-degree direction relative to the horizontal, pulling the moving block 56 and the movable

upper jaw 58 away from clamping engagement with the shaft 102 of the golf club 100. The golf club 100 is then removed from the golf club shaft remover 10.

These and other advantages of the present invention will be apparent to those skilled in the art from the foregoing specification. Accordingly, it will be recognized by those skilled in the art that changes or modifications may be made to the above-described embodiments without departing from the broad inventive concepts of the invention. It should therefore be understood that this invention is not limited to the particular embodiments described herein, but is intended to include all changes and modifications that are within the scope and spirit of the invention.

09676627.100200

## Claims

What is claimed is:

1. A method of removing a head of a golf club from a shaft of the golf club, comprising:
- securing the shaft of the golf club;
  - introducing a force on the head of the golf club, the force alone being capable of detaching the head of the golf club from the shaft of the golf club but for an epoxy bond securing the head of the golf club to the shaft of the golf club; and
  - heating the head of the golf club to a temperature which breaks the epoxy bond securing the head of the golf club to the shaft of the golf club, whereby the force detaches the head of the golf club from the shaft of the golf club.
2. A method of removing a head of a golf club from a shaft of the golf club, comprising:
- securing the shaft of the golf club;
  - compressing a spring which introduces a force on the head of the golf club, the force alone being capable of detaching the head of the golf club from the shaft of the golf club but for an epoxy bond securing the head of the golf club to the shaft of the golf club; and
  - heating the head of the golf club to a temperature which breaks the epoxy bond securing the head of the golf club to the shaft of the golf club, whereby the force detaches the head of the golf club from the shaft of the golf club.

3. An apparatus for removing a head of a golf club from a shaft of the golf club,  
comprising:

- a. a frame;
- b. a clamping mechanism connected to the frame for securing the golf club;

and

- c. a force mechanism connected to the frame, including
  - i. a hydraulic piston,
  - ii. a hollow shaft having an open end and a closed end, the closed end connected to the distal end of the piston,
  - iii. a spring having a first end and a second end, the spring residing within the hollow shaft with the first end abutting the closed end of the shaft, and
  - iv. a turret having a smaller diameter portion and a larger diameter portion, the smaller diameter portion inserted in the open end of the shaft and abutting the second end of the spring, the larger diameter portion being external to the shaft and having a slot designed to engage the shaft of the golf club while abutting the head of the golf club.

4. An apparatus for removing a head of a golf club from a shaft of the golf club,  
comprising:

- a. a frame including a block having a bore there through;
- b. a hydraulic piston mounted on the frame;
- c. a clamping mechanism connected to the frame for securing the golf

club;

d. a hollow shaft extending from the piston and slidably resident within the bore;

e. a spring residing within the hollow shaft; and

f. a turret in removable communication with the hollow shaft via the spring, the turret engaging the head of the golf club for transferring a force stored in the spring and created by the piston to the head of the golf club.

5. The apparatus of claim 4 further comprising an alignment spring for resisting axial movement of the shaft in response to the force created by the piston.

6. The apparatus of claim 4 wherein the turret is coaxially rotatable relative to the shaft to position slots of differing size in engaging alignment with the shaft of the golf club to bear against the head of the golf club.

7. The apparatus of claim 4 wherein the turret partially resides slidably within the hollow shaft and includes a plurality of open slots around the periphery thereof for receiving golf club shafts of differing diameters.

8. The apparatus of claim 6 further comprising an alignment spring connected to the shaft and the frame for resisting axial movement of the shaft in response to the force created by the piston.

9. The apparatus of claim 4 wherein the clamping mechanism is manually actuable.



10. The apparatus of claim 4 wherein the piston is manually actuatable.

11. The apparatus of claim 4 wherein the clamping mechanism includes a manually actuatable screw for adjusting the magnitude of securing force to a golf club.


12. The apparatus of claim 4 wherein the piston includes a piston handle pivotally movable with respect to the remainder of the piston in a horizontal plane, the horizontal plane being within the longitudinal extremities of the frame.



09576627-100200

**00000000000000000000**

[illegible]

**00000000000000000000**

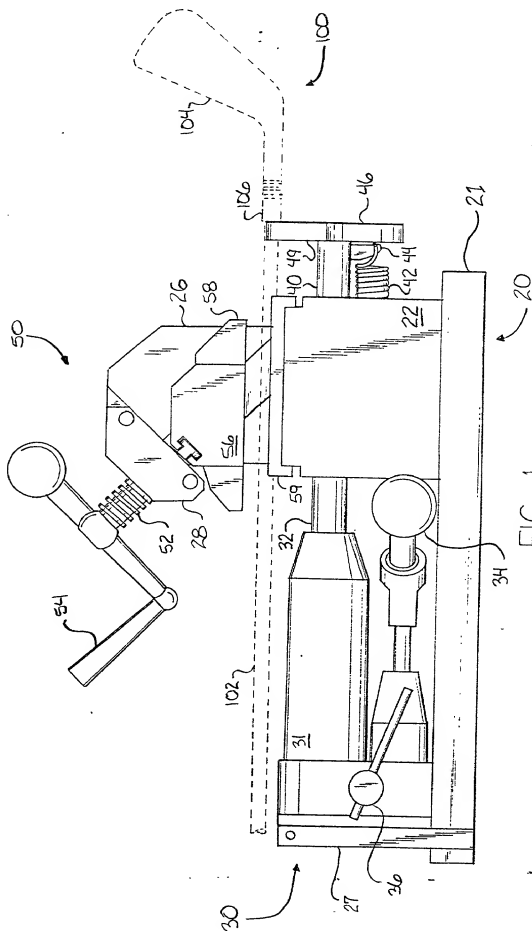

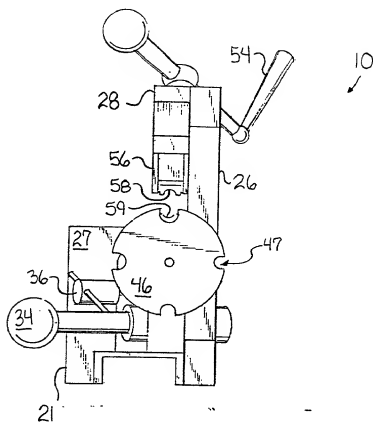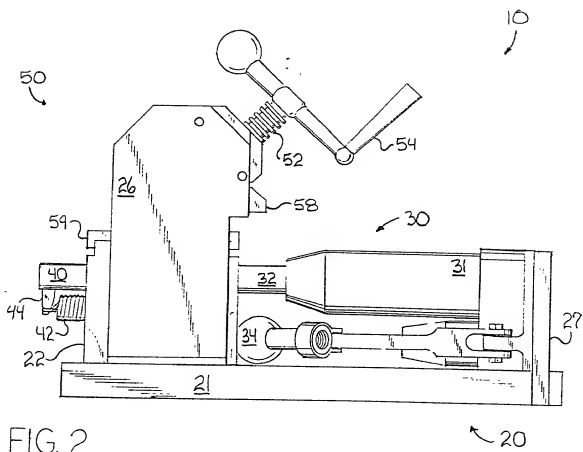

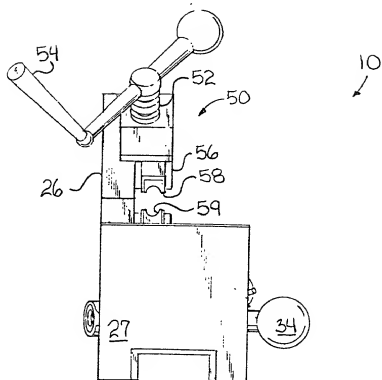


FIG. 4

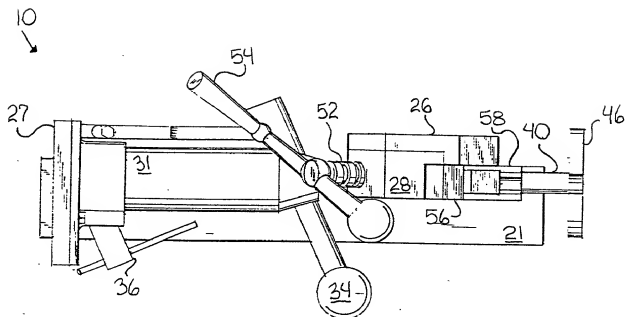


FIG. 5

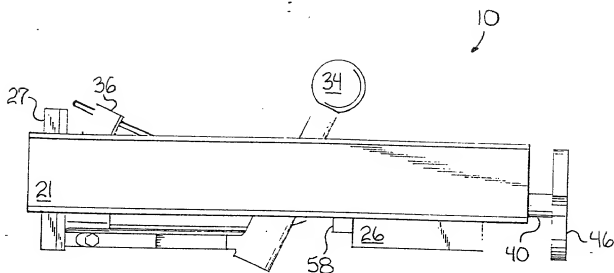


FIG. 6

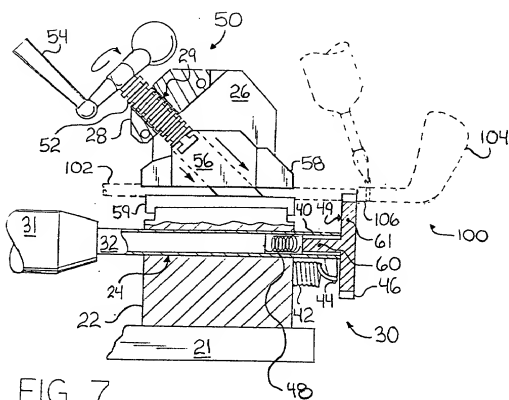


FIG. 7

